

PORTABLE TRIPOD WORKING LIGHT

HIGH LIGHT · Large range, high brightness, long range

Power:2X50W




Illuminating brightness Large range, high brightness, long range, long life of the bulb, the lamp tray consists of two efficient 50W LED lamp caps. The average service life is more than 50000 hours. and the lighting angle can be adjusted in a large range up and down, and the distance of concentrating light is more than 150 meters.



► Features

- ☑ the mast height is 1.6m ,2m,2.8m ,3.5m is for optional or customized
- ☑ Aluminium alloy or stainless steel material ,rugged ,durable and portable
- ☑ 2*50w LED light fix at the top of mast ,shooting distance 100-150m
- ☑ Philips or Osram brand ,the lifetime is more than 50000h,Brightness up to 150lm/W
- ☑ The direction and angle is adjustable
- ☑ Easy carry or move ,weight is less than 8kg
- ☑ Whole lamp IP 65 waterproof rating

► Product picture

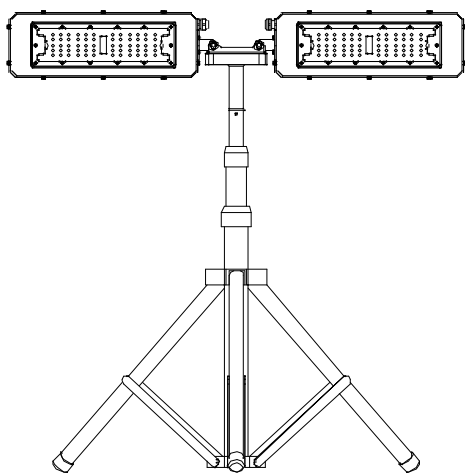

MODEL:BB-HJD-2X50W

DATA SHEET

Power	2X50W
Luminous Flux	15000lm
Dimension(mm)	H600(min)-3500(max)*W700
Net weight	7.6kg(16.75lb)
Beam Angle	120°
Materials	Aluminum alloy+PMMA lens
Luminous Efficacy	130/lm/W, 150lm/W Optional
Operation Temp	-40 to +45°C
CCT	2700K SW/3000K WW /4100K NW/5000K DW/5700K CW /6500K SCW
CRI	80+
Life Span	50,000 hours at 25°C
Voltage	100-277VAC/50-60Hz ,200-480VAC/50-60Hz
Driver	UL listed power supply
Dimming	0-10V dimmable (Optional)
Cover	PMMA
Luminous Source	3030 SMD LED
IP rating	Ip65
PF	>0.95
Warranty	5 Years

► Model Nomenclature

Model:BB-HJD-2x50W-AB-EFG-H,For example:BB-HJD-2x50W-LD-27K901-2.8M


Electric Character		Optics Character			Physical Character
A	B	E	F	G	H
Input voltage	Dimming	CCT	CRI	LED CHIP	Installation
L-100-277V H-200-480V	Blank-No Dim D-Dimmable	27K-2700K 30K-3000K 40K-4000K 50K-5000K 57K-5700K 65K-6500K	70-Ra70 80-Ra80 90-Ra90	1-Philips 2-Osram 3-HWX	Mild steel shelf bracket(max) 1.6m 2m 2.8m 3.5m

► Application case

Temporary lighting, engineering decoration, outdoor temporary lighting and so on




► Dimension

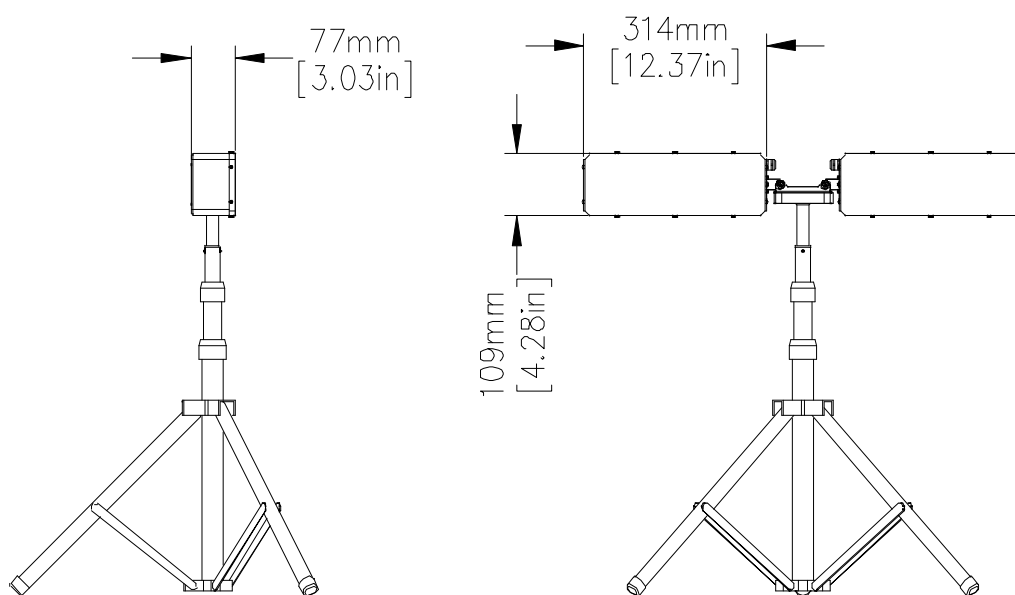


- The mast height is 1.6m ,2m,2.8m ,3.5m is for optional or customized


▶ Surface Of Intensity Distribution

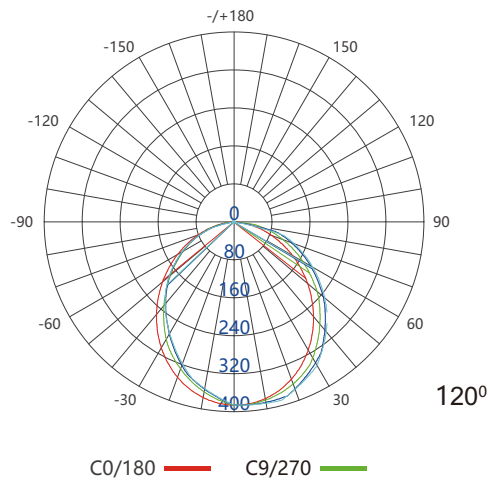

▶ Tripod Stand

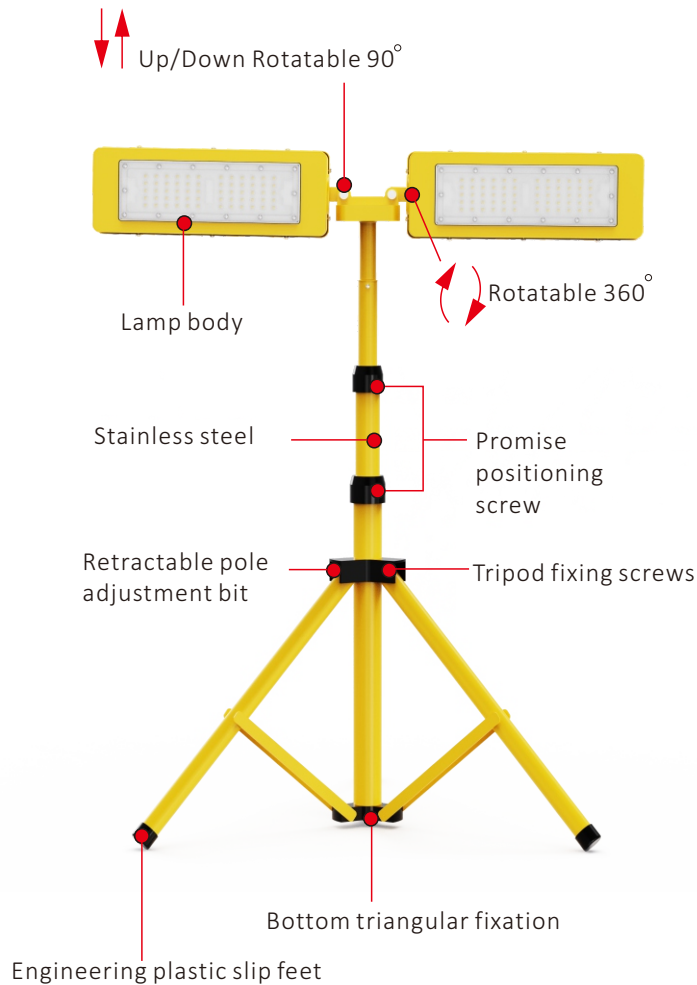


Lighting Direction Adjustment

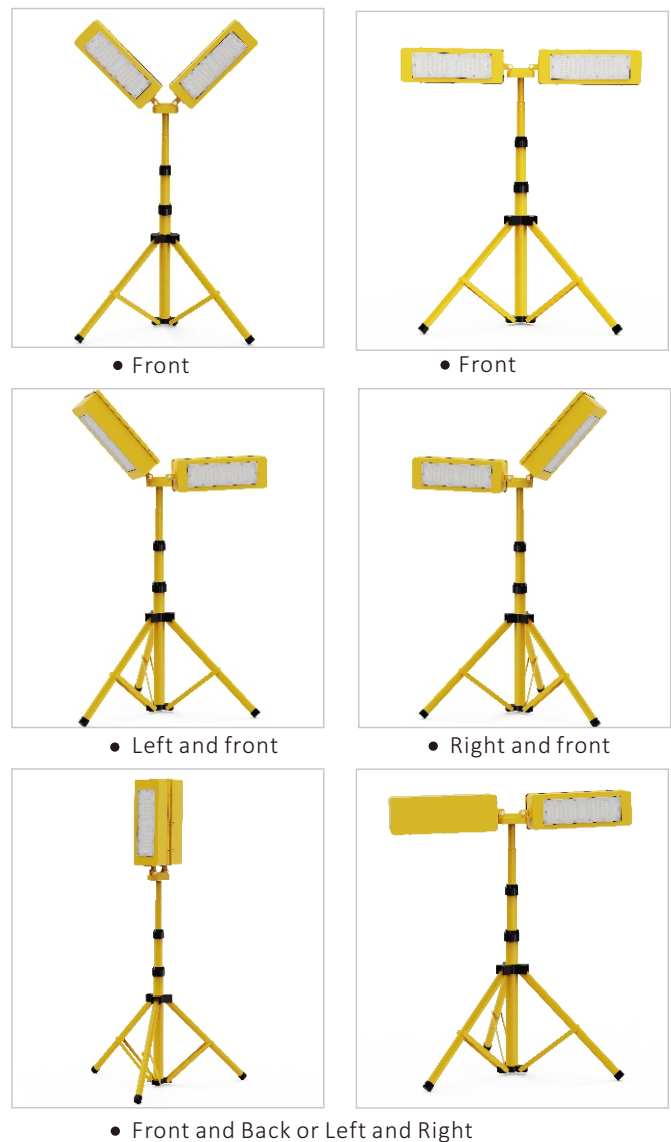


► Plug

Plug can be optional as required ,Please contact sales.

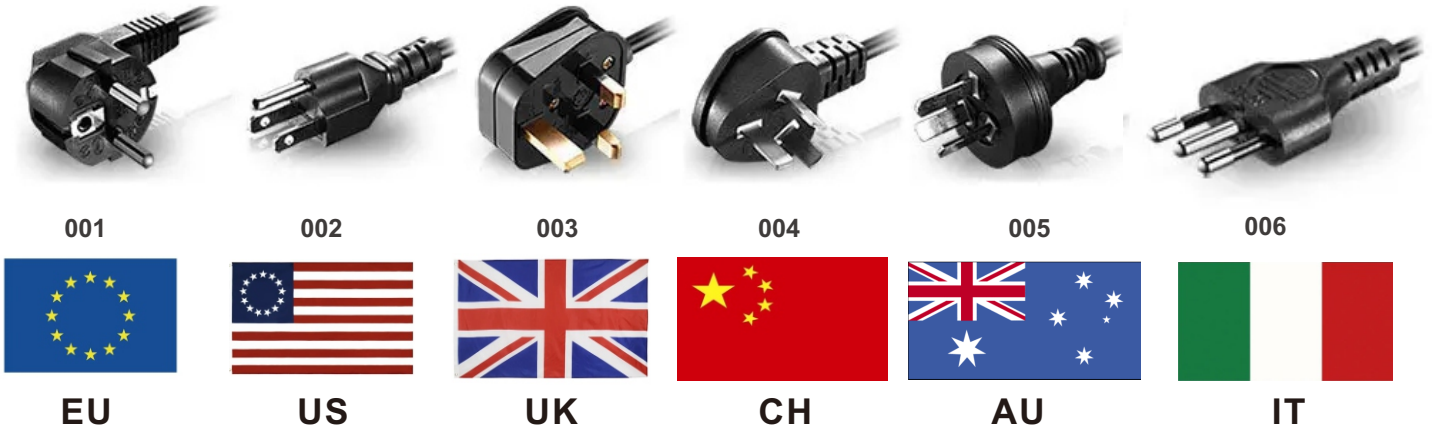

► Package

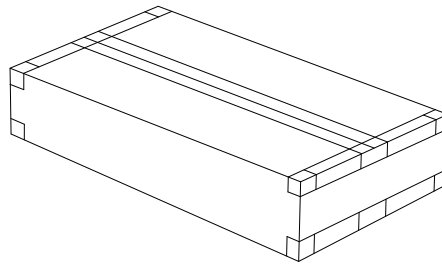

Item	Packaging	Carton Size(mm)	N.W	G.W
2X50W	1pc/CTN	680X180X380	7.6kg (16.75lb)	8.2kg (18.07lb)